




## WALKI®Pack Chill WALKI®Pack Frost

One side polymer coated products for packaging chilled or frozen foodstuffs.

### Technical Specification

GC 2 Simcote (+) + LDPE tr. matt

### WALKI®Pack Chill & Frost

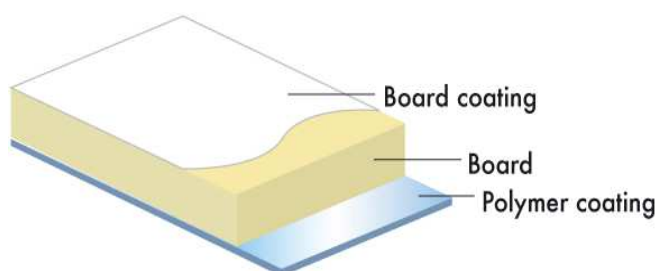

Grammage [g/m <sup>2</sup> ]	Thickness [µm]	Stiffness MD [mNm]	Stiffness CD [mNm]
DIN EN ISO 536	DIN 53105	L&W 5° ; DIN 53121	L&W 5° ; DIN 53121
<b>215/200+15</b>	365	19,0	8,6
<b>225/210+15</b>	390	22,5	10,4
<b>240/225+15</b>	415	28,4	13,3
<b>250/235+15</b>	440	31,6	15,0
<b>265/250+15</b>	465	37,3	18,4
<b>275/260+15</b>	490	42,1	20,7
<b>290/275+15</b>	515	48,8	24,6
<b>305/290+15</b>	565	59,4	29,9
<b>330/315+15</b>	615	72,1	35,5
<b>355/340+15</b>	665	84,3	41,1

<b>Brightness</b>	ISO 2470	84	<b>Tolerances</b>	Grammage	+/- 3%
<b>WVTR</b>	23° C, 50% r.m.	max. 7 g/m <sup>2</sup>		Thickness	+/- 4 %
	38° C, 90% r.m.	max. 28 g/m <sup>2</sup>		Stiffness	+/-15 %

1/2014

Walki GmbH - Plant Steinfurt  
D-48585 Steinfurt  
Tel. +49 2551 68-0  
Fax. +49 2551 68-90

Walki Ltd. – Plant Garstang  
UK-Preston PR1GG  
Tel. +44 1995 604 227  
Fax. +44 1995 604 222